

AdScreen
Outdoor



Features



SMD



Viewing
Angle



Energy
Saving



Outdoor

Installation



Pole



Pylon



Building



Wall



Curve



Custom

Applications



Commercial Shopping
Advertising Malls



Business



Hospitality



Education



Sport



Trevally Series

If price is of importance, yet still desire quality, then the Trevally Series is the way to go. Using Copper thread, 4 layers of anti-corrosion sealant behind the modules and MBI drivers gives peace of mind and quality assurance.




Value	T4	T5	T8	T10	T12
Pixel Pitch (mm)	4	5	8	10	12
Brightness (nits)	6000	6000	6000	6000	6000
Refresh Rate	>960	>960	>960	>960	>960
Pixel Matrix Per Panel	256 x 256	192 x 192	120 x 120	96 x 96	85 x 85
Pixel Matrix Per Sqm	62500	40000	15625	10000	6941
Power Consumption watt/sqm	850/260 Max/Avg	900/270 Max/Avg	950/300 Max/Avg	1000/330 Max/Avg	1140/380 Max/Avg
Panel Size (L x W x H)	960x960x140	960x960x140	960x960x140	960x960x140	960x960x140
Panel Weight (kgs)	46	46	46	46	46

Four Layer Anti-corrosion Sealant



SMD 3in1

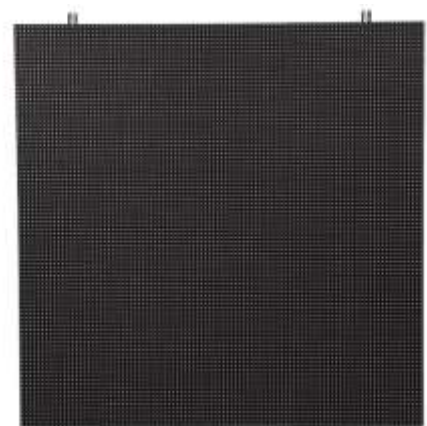

Mistake Tracking System



InfoAd Digital (Pty) Ltd

Co Reg: 2015/053495/07

14 Dover Street, Port Alfred

Tel: 0718000271

Email: andrew@infoad.co.za